



Yamaha PW

Operating Manual Installation Guide







Attention!

!

Read these instructions completely before using the device, keep the instructions and pass them on when handing over the device to other persons.

Product Features

The device offers the following functions after installation in eBikes with Yamaha PW drive system:

- Speed limit adjustable from 25 to 99 km/h via handlebar control buttons
- Adjustable dynamic mode with reduced "wall effect"
- Correct display of speed and distance
- Range calculation taking into account the current driving style
- Correct total distance after removal of the tuning module
- Wheel circumference adjustable with handlebar control buttons

All settings are made via the operating unit on the eBike. No smartphone or notebook is required.

The module is internally protected from splash water by a protective coating of the entire electronics.

Intended Use

The device is only suitable for installation in eBikes with Yamaha PW drive systems.

Legal and Safety Notes / Product Liability

- Operation of the eBike in public traffic is no longer permitted after installation of the module. The use is only allowed on private areas or designated test and race tracks.
- Damage caused in conjunction with the operation of the eBike will no longer be covered by private liability insurance after installation.
- Liability and warranty claims against the dealer or manufacturer of the eBike expire or are constricted.
- The eBike is subject to higher mechanical stress when operating at higher speed for which it is not designed. This results in additional safety risks.
- The installation and operation of the module is at your own risk. The manufacturer accepts no liability for damage that is connected with the operation of the device.

3



• Please inform yourself about possible further technical and legal consequences before installing the device.


Technical Data

Housing dimensions:	43mm x 22mm x 11mm
Cable length:	approx. 140mm
Weight:	0,025kg
Power consumption:	0,2W
Supply voltage:	12VDC

Installation (Example: Haibike SDURO Fullnine RX)

Required tools:


- Allen key 6mm
- Allen key 3mm
- Torque ratchet with Allen key 6mm

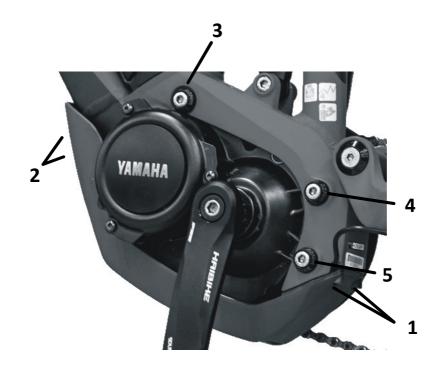




Procedure:

- 1. Remove battery
- 2. Remove the skid plate by removing the 4 screws (1) and (2). The screws behind the chainring do not need to be removed.
- 3. Loosen the screws (3), (4) and (5) of the motor.
- 4. Remove the screws (3) and (4) and fold down the motor.
- 5. Disconnect the cable to the speed sensor (3-wire) and cable to the LCD (4-wire).



6. Plug in the tuning module as shown.

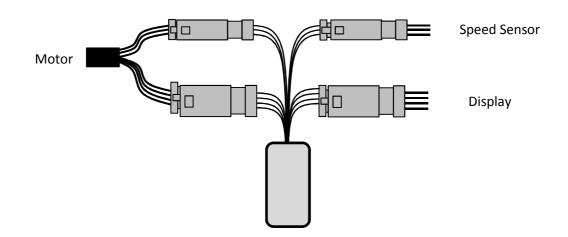

- 7. Insert the battery and carry out the initialization, see separate point setup.
- 8. If setup succeeds, remove the battery again.
- 9. Place the tuning module in a suitable location and route the cable so that the engine can be folded up without squeezing the cables.



Due to the large number of different drive systems, it is not possible to define a fixed installation location. Often a placement of the module in the down tube is possible.

10. Fold up the engine and reassemble the screws (3) and (4). Do not squeeze any cables.






In the case of full suspension bikes, make sure that the cable to the speed sensor at the transition to the rear triangle has enough room to move, otherwise it may break off during compression.

- 11. Tighten screws (3), (4) and (5) to 22Nm.
- 12. Fasten skid plate with screws (1) and (2).




Setup

Before the first use of the tuning module or after conversion to another bike the setup must always be carried out first. Even in the case of malfunctions, a defined state of the module can be restored by executing the setup.



Turn on the eBike.



10s 25°C 13:25 Ave 24.6 Km/h Press "arrow up" and "arrow down" at the same time for 3 seconds.

Speed 11.1 km/h is displayed for 10 seconds.



The wheel circumference stored in the drive unit is displayed for 5 seconds in centimeters. If necessary, adjust with the "arrow up" and "arrow down" buttons.



As soon as 0.0 km/h is displayed, the setup is finished.

7




Speed Mode

When speed mode is activated, the speed limit for the motor assistance is increased. The limit can be set from 25 to 99 km/h.

Turning off the eBike automatically turns off speed mode and must be reactivated after the bike is turned on.

Activation




5s and 25° 13:25 Ave 24.6 kmh Press "arrow up" for > 2 seconds.

Speed limit is displayed for 5 seconds. If desired, use the "arrow up" and "arrow down" keys to change. Possible values: 25 to 99 km/h. Default value: 32 km/h.



Display shows the normal driving speed again. Speed mode is active.

Deactivation






Press "down arrow" for > 2 seconds


Display shows 25.0km/h for 2 seconds. Speed mode is off.




Dynamic Mode

Exceeding the speed limit the motor power is reduced by default very much. A higher pedal force then results no longer in a higher speed, but in a lower motor assistance. For a more natural driving emotion in the dynamic mode the reduction is spread over a larger speed range, the so-called "wall effect" is significantly reduced and it can be driven with much more constant pedal force. The dynamic mode can only be activated when the speed mode is activated.

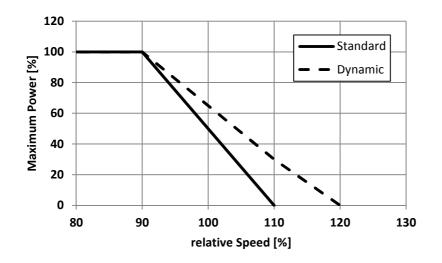



25 25 25 13:25 Ave 24.6 km/h



While driving (> 10km/h), press the pushing assist button for 2 seconds.

Dynamic mode off: 50.0 km/h is displayed for 2 seconds.


Dynamic mode on: 50.1 km/h is displayed for 2 seconds.




Range Calculation

The speed mode can significantly reduce the range of the eBike. In the original condition of the bike, the range is calculated only from the current battery charge level and the selected support level. When Speed Mode is activated, the current power consumption is additionally included in the range calculation, which makes the displayed remaining range more accurate.





Speed Modus on

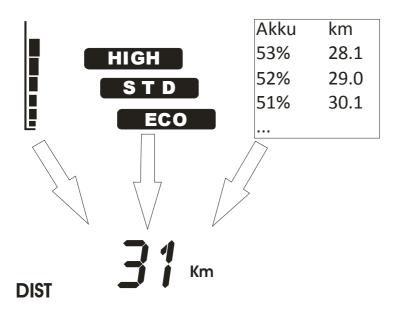



FAQ

At speeds above 25km/h it takes a bit longer to get motor support. Why is that?

If you do not pedal at higher speeds, the time is used to adjust the mileage in the drive unit to the actual kilometers by simulating a high wheel speed. If then pedaling starts it takes a little bit longer until the drive unit gives support. The time, however, is significantly less than a second.

Is the total mileage correct even after removing the module?

Yes. The total km measured by the drive unit are not changed by the tuning. This is ensured by a continuously working compensation function in the tuning module. However, before removing the module, the bike should remain switched on at standstill with the speed mode switched on until it shuts off by itself. This will ensure that the compensation function has correctly adjusted the mileage. However, any wheel circumference adjusted during the setup does not affect the mileage of the drive unit and there are deviations after removing the module.

The displayed distance (Odometer, Trip) or the speed is not correct. What can I do?

Run the setup again. As a result, the current mileage is taken over from the drive unit in the tuning module and you have the opportunity to re-adjust the wheel circumference if necessary.



Technical Support

For questions, suggestions or problems please email or phone. TLI Elektronik GmbH St.-Martin-Str. 11 86676 Ehekirchen <u>info@volspeed.de</u> phone: +49 (0) 8253 / 9279902

In addition to your request for support inquiries, please include the following information:

- Serial number and purchase number of the tuning module (S/N, P/N)
- eBike manufacturer, type and year of manufacture

To ensure that you always have the device data, you can enter it here before installing the device:

Purchase number (P/N):

Disposal

The tuning module should be disposed of in an environmentally correct manner.

For EC countries:



Electronic devices are valuable materials and do not belong in the household waste.

Dispose of the product at the end of its life in accordance with applicable legislation.